Installation And Safety Instructions

HC-1448

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture. Fill in Item Number on Carton and File This Sheet For Future Reference. ITEM#_____

112408

IMPORTANT SAFETY INSTRUCTIONS

- **Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.**
- **Use of other manufacturers components will void warranty, listing and create a potential safety hazard.**
- **If you are unclear as to how to proceed, contact a qualified electrician.**
- **You don't need special tools to install this fixture.**
- **Be sure to follow the steps in the order given.**
- **Read instructions carefully.**
- **Save these instructions.**

BEFORE YOU BEGIN

Carefully remove the fixture from the carton and check that all parts are included, as shown in figure 1 and figure 2. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. Parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

INSTALLATION

IMPORTANT: DO NOT ATTACH FIXTURE DIRECTLY TO OUTLET BOX.

STEP 1:

Run fixture mounting screws (B) through holes in universal mounting bar (A) all the way down to their heads.

STEP 2:

Using outlet box screws (not supplied) fasten universal mounting bar (A) to outlet box through slots in universal mounting bar (A). Be sure fixture mounting screws (B) are perfectly vertical so fixture hangs straight.

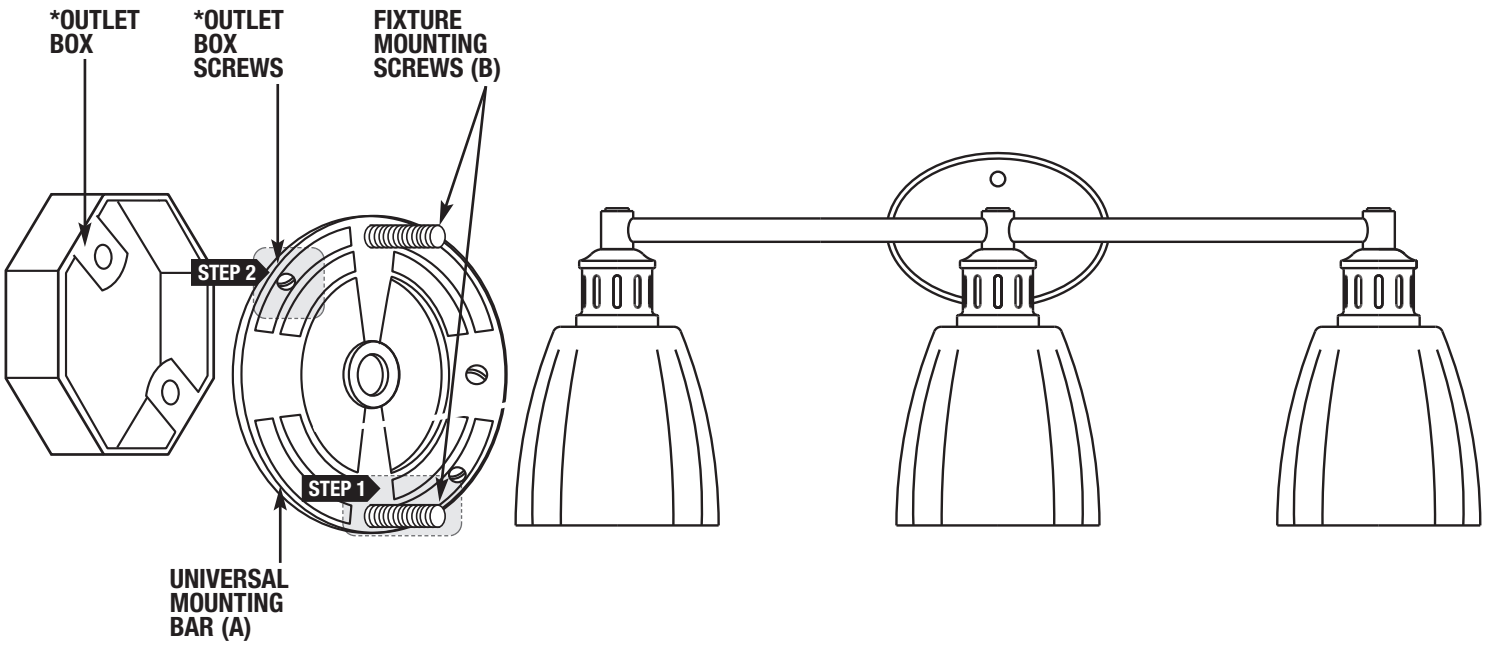

FIGURE 1

***NOT INCLUDED**

INSTALLATION (continued) HC-1448

STEP 3:

A. Use a listed wire connector to connect the fixture hot wire (black wire, or round and smooth tracer) to the supply hot wire.
B. Use a listed wire connector to connect the fixture common wire (white wire, or square and rigid) to the supply common wire.
C. Gently try to remove the wires from the connector. If you can remove the wires, carefully re-do the wiring connection.

STEP 4:

GROUNDING INSTRUCTIONS: The green grounding screw (G) is to be inserted into the hole with two raised dimples provided on the universal mounting bar (A). Wrap the ground wire from the fixture (if supplied) and the ground wire from the outlet box (bare metal or green insulated wire) around the green grounding screw (G) on the universal mounting bar (A). Tighten the green grounding screw (G) to secure. If uninsulated wire is on the universal mounting bar (A), connect the ground wire from the fixture (if supplied) and the outlet box to it using a small wire connector (not supplied). **NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.**

FINAL ASSEMBLY

Make sure no bare wires can be seen outside wire connectors.

STEP 5:

Make sure no bare wires can be seen outside wire connectors.

STEP 6:

After wires are connected, tuck them carefully inside outlet box. Push the canopy (C) firmly over the fixture mounting screws (B) and against the wall. Secure canopy (C) in place by threading cap nuts (D) onto fixture mounting screws (B).

STEP 7:

Place glass (E) onto socket and secure in place by threading retaining ring (F) to socket.

STEP 8:

Install lamps (not supplied).

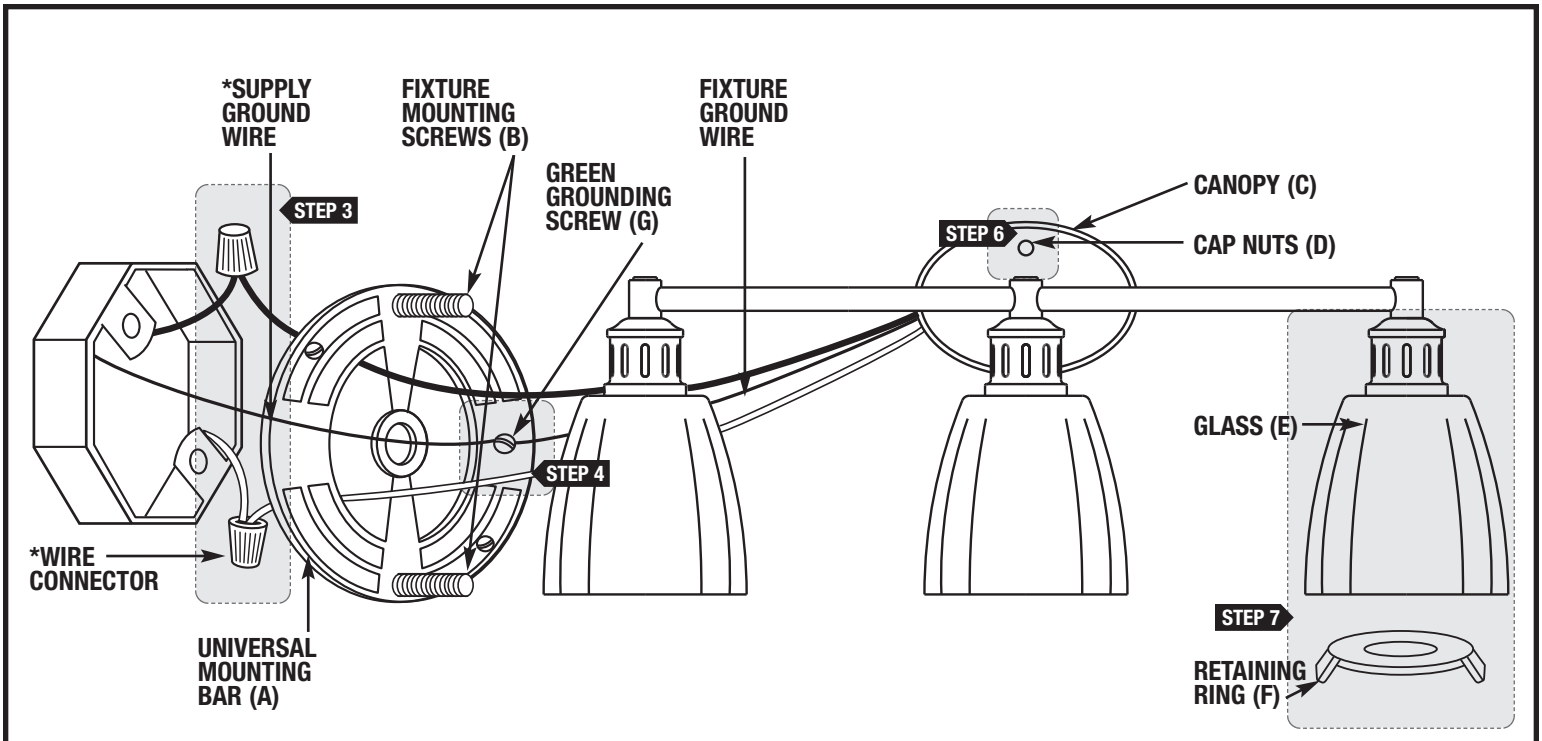

FIGURE 2 ***NOT INCLUDED**